

# Fixlon Tape

## No. 816



**Tape with special film that rarely leaves adhesive residue. Used for fixing and bundling.**

Even after long exposure to heat and light there is little adhesive residue. Because of the self-adhesive's strength, it also sticks to embossed surfaces. Because a special film is used, it has the same strong, stretch-ability as filament tape.

### Usage

- Attaching the electrical components and electrical parts of refrigerators, ventilator fans, etc.
- Fixing the parts of office machines, correspondence machines, etc.
- Fixing and bundling furniture and instruments.

Performance		
Test items	Unit	No. 816
Thickness of tape	μ	90
Thickness of base film	μ	60
Thickness of adhesive	μ	30
SP adhesive strength	g/19mm	650
Tack	1/32"	16
Holding power	gap mm	0.5
Unwinding force	g/19mm	210
Adhesive strength of embossed face	g/19mm	510
Tensile strength	kg/19mm	38
Elongation	%	48
10% Modulus	kg/mm	17
Heat resistance	Acrylic coated board	○
	PP resin board	○
	ABS resin board	○
Resistance to climatic conditions	Acrylic coated board	○
	PP resin board	○
	ABS resin board	○

1) Measurement conditions/23 °C, 65%RH

2) Heat resistance/60 °C x5days


3) Resistance to climatic conditions/ Ultraviolet rays carbon arcx72hr

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base color
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	White
12×50	1	120	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Bundling</div> <div style="border: 1px solid black; padding: 2px;">Temporary fixing</div> </div>
15×50	1	80	
19×50	1	60	
25×50	1	60	

# Danmate Tape

## No. 670S

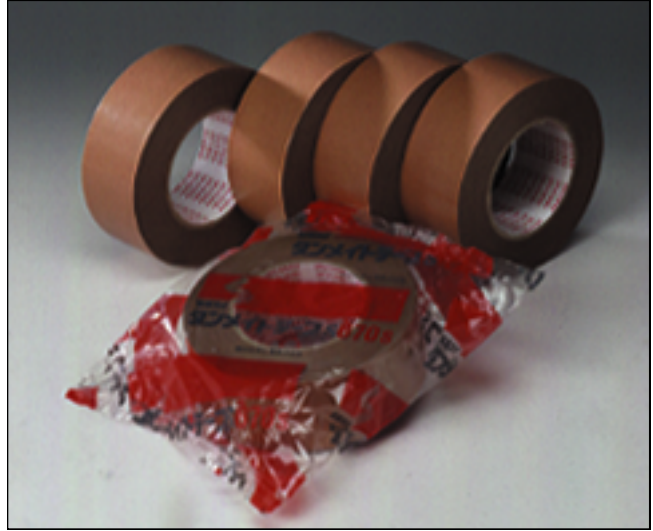

**Highly functional equivalent to cloth tape. Easy to tear, but strong.**

Dunmate tape is made from a special, complex film combined with a polluted, adhesive and it is easy to unwind and tear by hand. It has a wide range of uses, including sealing cardboard boxes. It can be used for heavy and light packages.

### Usage

- Sealing cardboard boxes, wooden boxes, plastic cases, etc.
- Outer packaging of machinery, paper, film, and other wrapped items
- Exporting heavy packages
- Repairing and special, pollution-resistant needs

Performance		
Test items	Unit	No. 670S
Thickness of tape	mm	0.180
Thickness of base material	mm	0.145
Adhesive strength	N/10mm (g/10mm)	6.60 (673)
Tack	Ball No.	30
Unwinding force	N/10mm (g/10mm)	1.0 (102)
Holding power	mm	0.0
Tensile strength	N/10mm (K g/10mm)	72 (7.33)
Elongation	%	10

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base color
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	Brown
25×50	1	80	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Medium and heavy packaging</div> <div style="border: 1px solid black; padding: 2px;">Tear-able by hand</div> <div style="border: 1px solid black; padding: 2px;">Non-slip</div> <div style="border: 1px solid black; padding: 2px;">Writable</div> <div style="border: 1px solid black; padding: 2px;">Stackable</div> <div style="border: 1px solid black; padding: 2px;">Low temperature</div> </div>
38×50	1	50	
50×50	1	40	
60×50	1	30	
75×50	1	30	